

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 June 2001 (28.06.2001)

PCT

(10) International Publication Number  
**WO 01/47106 A2**

(51) International Patent Classification<sup>7</sup>: H03G 3/00

(74) Agent: CHAFFRAIX, Jean; Internationaal Octrooi-  
reau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/EP00/12387

(81) Designated States (*national*): CN, JP, KR.

(22) International Filing Date: 8 December 2000 (08.12.2000)

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

(25) Filing Language: English

(26) Publication Language: English

Published:

— Without international search report and to be republished  
upon receipt of that report.

(30) Priority Data:  
09/469,887 22 December 1999 (22.12.1999) US

(71) Applicant: KONINKLIJKE PHILIPS ELECTRON-  
ICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA  
Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(72) Inventor: MOHINDRA, Rishi; Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL).



WO 01/47106 A2

(54) Title: TRANSMITTER POWER AMPLIFIER RAMPING METHOD

(57) Abstract: A method for reducing frequency glitches in a digital transceiver due to power amplifier input impedance variations. According to the method, the power amplifier is switched on after the end of a prior packet reception period and before a new packet transmission begins. Instead of ramping the power amplifier gain, the method ramps the modulation signals. As a consequence, any VCO frequency transients that may result from turning on the power amplifier have an opportunity to decay before the new packet transmission is initiated. This technique effectively isolates the transmitter power amplifier from the frequency synthesizer VCO to facilitate fast switching transceiver operation.

## Transmitter power amplifier ramping method

## BACKGROUND OF THE INVENTION

## Technical Field

The present invention relates generally to the field of communication electronics and, in particular, to a method for reducing frequency glitches during ramping of a power amplifier in a digital transceiver.

## Description of the Related Art

Spread spectrum is a communication technique that has found widespread use for both military and commercial applications. In a spread spectrum communication system, the transmitted modulation is spread (i.e., increased) in bandwidth prior to transmission over the channel and then despread (i.e., decreased) in bandwidth by the same amount at the receiver.

One of the target applications for spread spectrum is to facilitate wireless or radio communications between separated electronic devices. For example, a wireless local area network (WLAN) is a flexible data communication system that uses radio technology to transmit and receive data over the air, thereby reducing or minimizing the need for wired connections. In a typical WLAN, an access point is provided by a transceiver that connects a wired network from a fixed location. End users connect to the WLAN through transceivers that are typically implemented as PC cards in a laptop computer, or ISA or PCI cards for desktop computers. The transceiver may also be integrated with any device, such as a handheld computer, personal digital assistant, or the like.

The majority of the WLAN products available in the marketplace today are proprietary spread spectrum solutions targeting vertical applications operating in the 900MHz and 2.4GHz ISM frequency bands. These products include, as mentioned above, wireless adapters and access points in PCMCIA, ISA and custom PC board platforms. A typical spread spectrum transceiver comprises a conventional IF radio circuit, coupled to a baseband processor, which provides the desired modulation of the signal to be transmitted and the desired demodulation of a signal received at the transceiver. The IF radio circuit includes a frequency synthesizer that includes a voltage controlled oscillator (VCO) and a phase-locked loop (PLL). The baseband processor performs a given spread spectrum modulation

technique such as direct sequence (DS) modulation, frequency hopping (FH) modulation, time hopping (TH) modulation, or hybrid modulations that blend together one or more of the various schemes.

5 The spread spectrum transceiver as described above typically operates in a time division duplex (TDD) mode of operation wherein the transmitter is switched on during packet transmission and switched off during packet reception. The transmitter includes a number of components including a power amplifier, and a pair of up-converter mixers. Typically, the transmitter power amplifier is only turned on when sending a data packet (or perhaps just before). The power amplifier is "ramped" on (as opposed to being hard-  
10 switched) to reduce spectral splatter, i.e., the leaking of RF signals into adjacent signal channels. Power ramping is achieved by adjusting (i.e., increasing) the gain of the power amplifier.

The frequency synthesizer, on the contrary, must remain on during both TDD signal transmission and reception. When the power amplifier is ramped, however,  
15 undesirable frequency variations are produced in the frequency synthesizer due to changes in the amplifier's input impedance. The phase-locked loop cannot instantaneously correct for these frequency variations. Moreover, as the frequency error becomes large, a far end receiver cannot be synchronized properly to the transmitted signal.

In the prior art, this problem has sought to be addressed by isolating the  
20 transmitter power amplifier from the synthesizer VCO. Figure 3 shows the additional isolation, namely the buffers 326 and 312, incorporated between the VCO 322 and the power amplifier 314. The buffers 326 and 312 are usually multistage sections in order to attain a high isolation as defined by  $S_{21}/S_{12}$ ,  $S_{12}$  being the forward gain (from point A to B) and  $S_{21}$  being the reverse gain. Figure 1 illustrates the isolation process, which involves  
25 switching on the transmitter components (other than the power amplifier) at the end of a reception period  $R_x$  and then ramping the power amplifier at a later instant, usually upon transmission of a preamble that precedes the actual signal payload. As shown in Figure 1, however, this operation still results in an undesirable VCO frequency transient (i.e., a glitch) when the power amplifier ramps on. Moreover, this isolation technique is not sufficient for  
30 fast switching transceivers that need to comply with IEEE 802.11 standards, which require frequency accuracy better than 25 ppm.

The present invention addresses this problem.

## BRIEF SUMMARY OF THE INVENTION

According to the present invention, the transmitter power amplifier is switched on with other transmitter components after the end of a prior packet reception period and before a new packet transmission begins. Because the power amplifier is already on, the power "ramping" is accomplished by monotonically increasing the in-phase and quadrature-phase baseband modulation signals that are applied to the up-converter mixers. Thus, instead of ramping the power amplifier gain, the method ramps the modulation signals that are applied to the power amplifier. As a consequence, any VCO frequency transients that may result from turning on the power amplifier have an opportunity to decay before the new packet transmission is initiated. This technique effectively isolates the transmitter power amplifier from the frequency synthesizer VCO to facilitate fast switching transceiver operation.

The foregoing has outlined some of the more pertinent objects and features of the present invention. These objects and features should be construed to be merely illustrative of some of the more prominent features and applications of the invention. Many other beneficial results can be attained by applying the disclosed invention in a different manner or modifying the invention as will be described. Accordingly, other objects and a fuller understanding of the invention may be had by referring to the following Detailed Description.

## 20 BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference should be made to the following Detailed Description taken in connection with the accompanying drawings in which:

Figure 1 is a simplified illustration of a prior art power amplifier ramping technique and the attendant VCO frequency glitch caused by power amplifier load impedance variations;

Figure 2 is a block diagram of a known spread spectrum transceiver in which the present invention is implemented;

Figure 3 is a simplified block diagram of a transmitter portion of the spread spectrum transceiver of Figure 2 illustrating the basic components of the power amplifier circuitry;

Figure 4 is an illustration of the inventive power amplifier ramping technique of the present invention; and

Figure 5 is an alternate embodiment of the present invention wherein the inventive power ramping technique is used in an analog transmitter circuit.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5           Figure 2 illustrates a known wireless transceiver 200 in which the present invention may be implemented. The transceiver may be used for WLAN applications in the 2.4 GHz ISM band in accordance with the proposed IEEE 802.11 standard, although this is not a limitation of the present invention. The transceiver comprises selectable antennas 202 coupled to a RF power amplifier and transmit/receive switch 204. A low noise amplifier 206  
10 is also operatively coupled to the antennas. The transceiver also includes an up/down converter 208 connected to both the low noise amplifier 206 and the RF power amplifier and transmit/receive switch 204. The up/down converter 208 is connected to a dual frequency synthesizer 210 and a quadrature IF modulator/demodulator 212. IF modulator/demodulator 212 includes a received signal strength indicator (RSSI) function for providing an RSSI  
15 monitoring or "sniffing" function, as is well-known. One or more filters 214 and voltage controlled oscillators (VCOs) 216 may also be provided. The above components comprise a conventional radio portion of the spread spectrum transceiver. Familiarity with the operation of such components is presumed.

          A spread spectrum baseband processor 218 is coupled to the radio portion and  
20 contains all of the functions necessary to facilitate full or half duplex packet-based spread spectrum communications as is also well-known in the art. In particular, the processor has on-board dual, flash A/D converters 220 and 222 for receiving in-phase (I) and quadrature (Q) signals from the IF modulator 212. The baseband processor also includes another flash A/D converter 224 for processing the received signal strength indicator (RSSI) voltage from  
25 the IF modulator 212. A clear channel assessment (CCA) circuit 226 provides a clear channel assessment function to avoid data collisions and to optimize network throughput. The flash A/D converter outputs are supplied to the demodulator 228, which despreads the received signal. The modulator 230 performs the spreading function, as is well understood. An interface circuit 232 is connected to the both the demodulator 228 and the modulator 230  
30 to interface the data to/from the baseband processor. Again, all of the above components are well-known to one of ordinary skill in the art.

          One type of spread spectrum technique is direct sequence modulation. For illustration purposes, the present invention will be described in the context of a direct sequence baseband processor, although this is not a limitation of the invention as will be

seen. A direct sequence modulation is formed by linearly modulating an output sequence of a pseudorandom number (PN) generator onto a train of pulses, each having a duration called the chip time. An 11 bit Barker sequence (i.e., +++---+--+ ) may be used for this purpose.

The use of an 11 bit Barker sequence, of course, is merely exemplary. A Barker sequence is

5 a binary  $\{-1, +1\}$  sequence  $\{s(t)\}$  of length  $n$  having aperiodic autocorrelation values

$|\rho_s(\tau)| < 1$  for all  $\tau$ ,  $-(n-1) < \tau < n-1$ . Typically, this type of modulation is used with binary phase-shift-keyed (BPSK) information signals. A direct sequence BPSK signal is generated by multiplying the BPSK signal by the direct sequence modulation. To demodulate a

received BPSK signal, a local PN random generator (which generates the PN waveform at

10 the receiver used for despreading) must be synchronized to within one chip of the PN waveform of the received BPSK signal. This function is done by a search routine that steps the local PN waveform sequentially in time by a fraction of a chip and, at each position,

searches for a high degree of correlation between the received and local PN reference waveforms. The search ends when the correlation exceeds a given threshold, which is an

15 indication that a coarse alignment has been achieved. After bringing the two PN waveforms into coarse alignment, a delay-locked or tau-dither tracking loop is used to maintain a fine alignment. Further details of this process are described, for example, in *The Communications Handbook*, 16.4 (1997), CRC Press, which is incorporated herein by reference.

Referring now to Figure 3, the conventional power amplifier circuitry 300 of a

20 transmitter of a spread spectrum transceiver is shown. A representative transceiver is a Philips Model SA2400 2.46HZ Direct Conversion Zero IF Transceiver, although the invention may be implemented in any transceiver or transmitter that uses power ramping. The power amplifier circuitry comprises a pair (F1, F2) of channel filters 302 and 304, in-

phase and quadrature-phase up-converter mixers 306 and 308, a summer 310, a buffer

25 amplifier 312, and a power amplifier 314. The frequency synthesizer 320 comprises a voltage controlled oscillator 322, a phase-locked loop (PLL) 324, a buffer 326, and a phase shifter 328. Typically, the power amplifier 314 is turned off except during (or just before)

packet transmission. The frequency synthesizer remains on, however, as it is used in both

30 packet transmission and reception, for instance, in a time division duplex (TDD) transceiver. As is also well-known, to avoid spectral splatter, the power amplifier 314 is ramped, as opposed to being hard-switched, when it becomes necessary to initiate or terminate a packet transmission. In the prior art, however, ramping was accomplished by increasing or decreasing the amplifier gain, typically when the packet preamble began or ended. As the amplifier was switched on, however, its input impedance varied, which caused frequency

variations in the frequency synthesizer 320, The PLL 324 cannot instantaneously correct these frequency variations.

To overcome this problem, the present invention implements a novel power ramping control method. According to the method, the power amplifier 314 is switched on after the end of a prior packet reception period and before a new packet transmission begins. Instead of ramping the power amplifier gain, the method ramps the baseband modulation signals that are supplied to the up-converter mixers. As a consequence, any VCO frequency transients that may result from turning on the power amplifier have an opportunity to decay before the new packet transmission is initiated. This technique fully isolates the transmitter power amplifier from the frequency synthesizer VCO.

In a preferred embodiment, the power amplifier is switched on sufficiently early so that any disturbance in the VCO frequency has settled down before the next packet transmission is initiated. In a particularly preferred embodiment, the power amplifier is turned on as soon as possible following receipt of a packet by the receiver portion. As is well-known, there are many techniques for determining when a receive packet period has ended. Thus, for example, the end of a packet reception period may be determined by looking for the end of a transmission burst, looking for a CRC code, by examining a frame delimiter in a data field, by calculating the reception period using length data in a frame header, or the like. Any convenient technique may be used, as the inventive method is designed to be backwards-compatible with existing transceiver circuitry.

Once the receiver identifies the end of the packet reception (or whenever the signal has to be transmitted) and the power amplifier is turned on in advance, the transmitter waits for initiation of a new packet transmission. Typically, there is an enforced delay between the end of a receive packet and the start of a new packet transmission. When the new packet transmission begins, or just shortly before (during the packet preamble), the in-phase and quadrature-phase baseband signals supplied to the up-converter mixers 306 and 308 are ramped. In a preferred embodiment, ramping is accomplished by simple linear scaling of the digital words as those words are output from the baseband processor. Figure 4 illustrates the resulting operation. In this example, preferably the baseband signals are ramped 400 beginning with the packet preamble, with the ramping lasting about 2 microseconds. The preamble typically is much longer than the ramping duration. As can be seen, the early turn-on 402 of the power amplifier results in a frequency variation in the VCO output, however, this output has already died down by the time the  $V_I$  and  $V_Q$  baseband signals are ramped. As a result, there is no frequency glitch or transient when the actual

signal transmission begins. This control method thus provides significant advantages as compared to the prior art power amplifier ramping techniques.

In the method described above, no changes are required to the conventional transmitter or frequency synthesizer circuitry. The control signals necessary to provide the inventive functionality may be generated in any convenient manner, e.g., a software-driven processor, a microcontroller, a finite state machine, in hardwired logic, an application specific integrated circuit (ASIC), a field programmable gate array (FPGA), or the like. While the digital implementation is preferred, one of ordinary skill in the art will appreciate that the ramping signal may be analog. Figure 5 illustrates such an alternate embodiment.

In Figure 5, the digital words output from the baseband processor are first converted to analog signals by digital-to-analog converters 502 and 504, with the resulting outputs then ramped using a pair of multipliers 506 and 508. The multipliers are connected to the I and Q inputs and are supplied with a power ramping signal  $r(t)$ . The analog ramping signal  $r(t)$  may be generated as follows. Upon toggling of the Tx/Rx pin (at  $t=t_0$ ), a comparator 510 is triggered at  $t=t_1$  through a first low pass filter 512. A second low pass filter 514, controlled by the comparator 510, controls each multiplier.

In the examples given, power ramping-up has been described. The same principles for ramping up apply to power ramping down, by ramping the modulation signal.

Following are some aspects of the invention.

1. In a transceiver (200) having a power amplifier (314) and a pair of up-converter mixers (306, 308), an improved power ramping method comprising:

switching on the power amplifier after an end of a prior packet reception period (402); and

ramping modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission (400).

2. The method as described in item 1 wherein the modulation signals are in-phase and quadrature-phase signals.

3. The method as described in item 2 wherein the modulation signals are ramped by monotonically scaling a set of digital words representing the in-phase and quadrature-phase signals.

4. The method as described in item 2 wherein the modulation signals are ramped by applying an analog ramping signal to the in-phase and quadrature-phase signals.



5. The method as described in item 1 further include the step of delaying initiation of the new packet transmission for a given time following the end of the prior packet reception period.
6. The method as described in item 1 wherein initiation of the new packet transmission begins with a preamble.
7. The method as described in item 1 wherein the foregoing step occurs over a given time period.
8. A transceiver (200), comprising:  
a receiver;  
a transmitter including a power amplifier (312), a pair of up-converter mixers (306, 308);  
a frequency synthesizer (320) including a voltage-controlled oscillator (VCO) (322);  
a controller (330) for isolating the power amplifier from the VCO, comprising:  
means for switching on the power amplifier after a prior packet reception period (402), and  
means for ramping modulation signals supplied to up-converter mixers upon initiation of a new packet transmission (400).
9. The transceiver as described in item 8 wherein the modulation signals are in-phase and quadrature-phase modulation signals.
10. The transceiver as described in item 9 wherein the means monotonically scales a set of digital words representing the in-phase and quadrature-phase signals.
11. The transceiver as described in item 9 wherein the means includes:  
means for generating an analog ramping signal (514); and  
means for applying the analog ramping signal to the in-phase and quadrature-phase baseband signals.
12. The transceiver as described in item 11 wherein the means for applying is a multiplier (506, 508).
13. The transceiver as described in item 8 that is the IEEE 802.11 standard.
14. A transceiver for use in a wireless local area network (N), comprising:  
a radio circuit including a power amplifier (312), a pair of up-converter mixers (306, 308), and a frequency synthesizer (320);

a processor coupled to the radio circuit and including means for generating modulation signals that are supplied to the up-converter mixers; and

a controller (330) for switching on the power amplifier at an end of a prior packet reception period (402) and for ramping the modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission (400).

15. The transceiver as described in item 14 wherein the controller (330) monotonically scales a set of digital words representing modulation signals.

16. The transceiver as described in item 14 wherein the controller includes:  
means for generating an analog ramping signal (510, 512, 514); and  
means for applying the analog ramping signal to the modulation signals.

17. A power ramping method operative in a transmitter having a power amplifier (312), comprising:

turning off the power amplifier upon initiation of a packet reception;  
upon completion of the packet reception, turning on the power amplifier (402);

and  
ramping modulation signals supplied to the power amplifier upon initiation of a new packet transmission (400).

18. The power ramping method as described in item 17 wherein the modulation signals are in-phase and quadrature-phase signals.

19. The power ramping method as described in item 18 wherein the modulation signals are ramped by monotonically scaling a set of digital words representing the in-phase and quadrature-phase signals.

20. The power ramping method as described in item 17 wherein initiation of the new packet transmission begins with a preamble.

21. In a spread spectrum transceiver (200) having a power amplifier (312) and a pair of up-converter mixers (306, 308), an improved power ramping method comprising:

switching on the power amplifier sufficiently in advance of a packet transmission (402); and

ramping modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission (400).

22. A transceiver, comprising:

a receiver;

a transmitter including a power amplifier, and a pair of up-converting mixers;

a frequency synthesizer including a voltage controlled oscillator;

a controller for isolating the power amplifier in advance of packet transmission; and

means for ramping modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission.

5 23. A transceiver as described in item 22, further comprising means for ramping down signals at the end of packet transmission.

24. A transceiver as described in item 11, wherein the means for applying is a multiplier.

25. A power ramping method as described in item 17, further comprising turning  
10 off the power amplifier after ramping down of transmission power.

Having thus described my invention, what I claim as new is set forth in the following claims.

## CLAIMS:

1. In a transceiver (200) having a power amplifier (314) and a pair of up-converter mixers (306, 308), an improved power ramping method comprising:  
switching on the power amplifier after an end of a prior packet reception period (402); and

5 ramping modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission (400).

2. The method as described in Claim 1 wherein the modulation signals are in-phase and quadrature-phase signals.

10 3. The method as described in Claim 2 wherein the modulation signals are ramped by monotonically scaling a set of digital words representing the in-phase and quadrature-phase signals.

15 4. The method as described in Claim 2 wherein the modulation signals are ramped by applying an analog ramping signal to the in-phase and quadrature-phase signals.

20 5. The method as described in Claim 1 or 2, or 3 or 4 further including the step of delaying initiation of the new packet transmission for a given time following the end of the prior packet reception period.

6. A transceiver (200), comprising:  
a receiver;  
a transmitter including a power amplifier (312), and  
25 a pair of up-converter mixers (306, 308);  
a frequency synthesizer (320) including a voltage controlled oscillator (VCO) (322);  
a controller (330) for isolating the power amplifier and the VCO, comprising:

means for switching on the power amplifier after an end of a prior packet reception period (402), and

means for ramping modulation signals supplied to the up-converter mixers upon initiation of a new packet transmission (400).

5

7. The transceiver as described in Claim 6 wherein the modulation signals are in-phase and quadrature-phase modulation signals.

8. The transceiver as described in Claim 7 wherein the ramping means  
10 monotonically scales a set of digital words representing the in-phase and quadrature-phase signals.

9. The transceiver as described in Claim 7 wherein the ramping means includes:  
means for generating an analog ramping signal (510, 512, 514); and  
15 means for applying the analog ramping signal to the in-phase and quadrature-phase baseband signals.

10. The transceiver as described in any Claims of 6 to 9 that is compliant with the IEEE 802.11 standard.

1/3

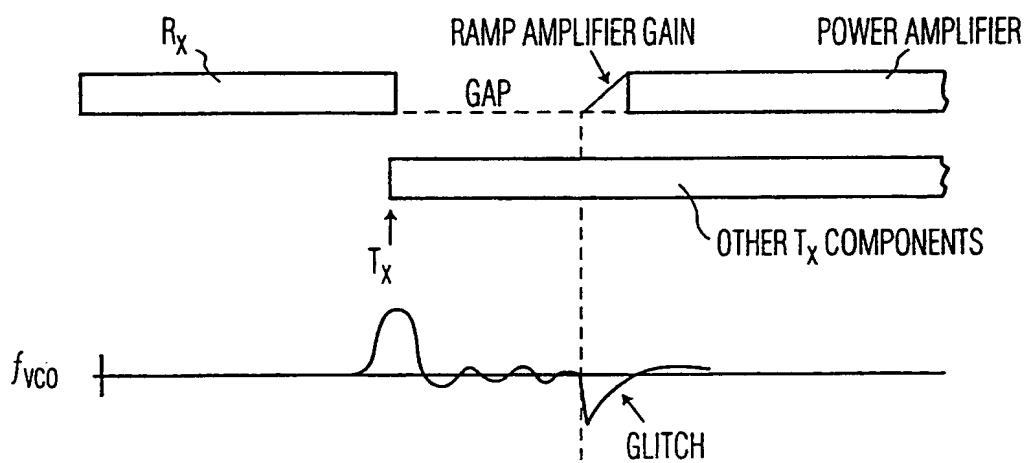


FIG. 1  
PRIOR ART




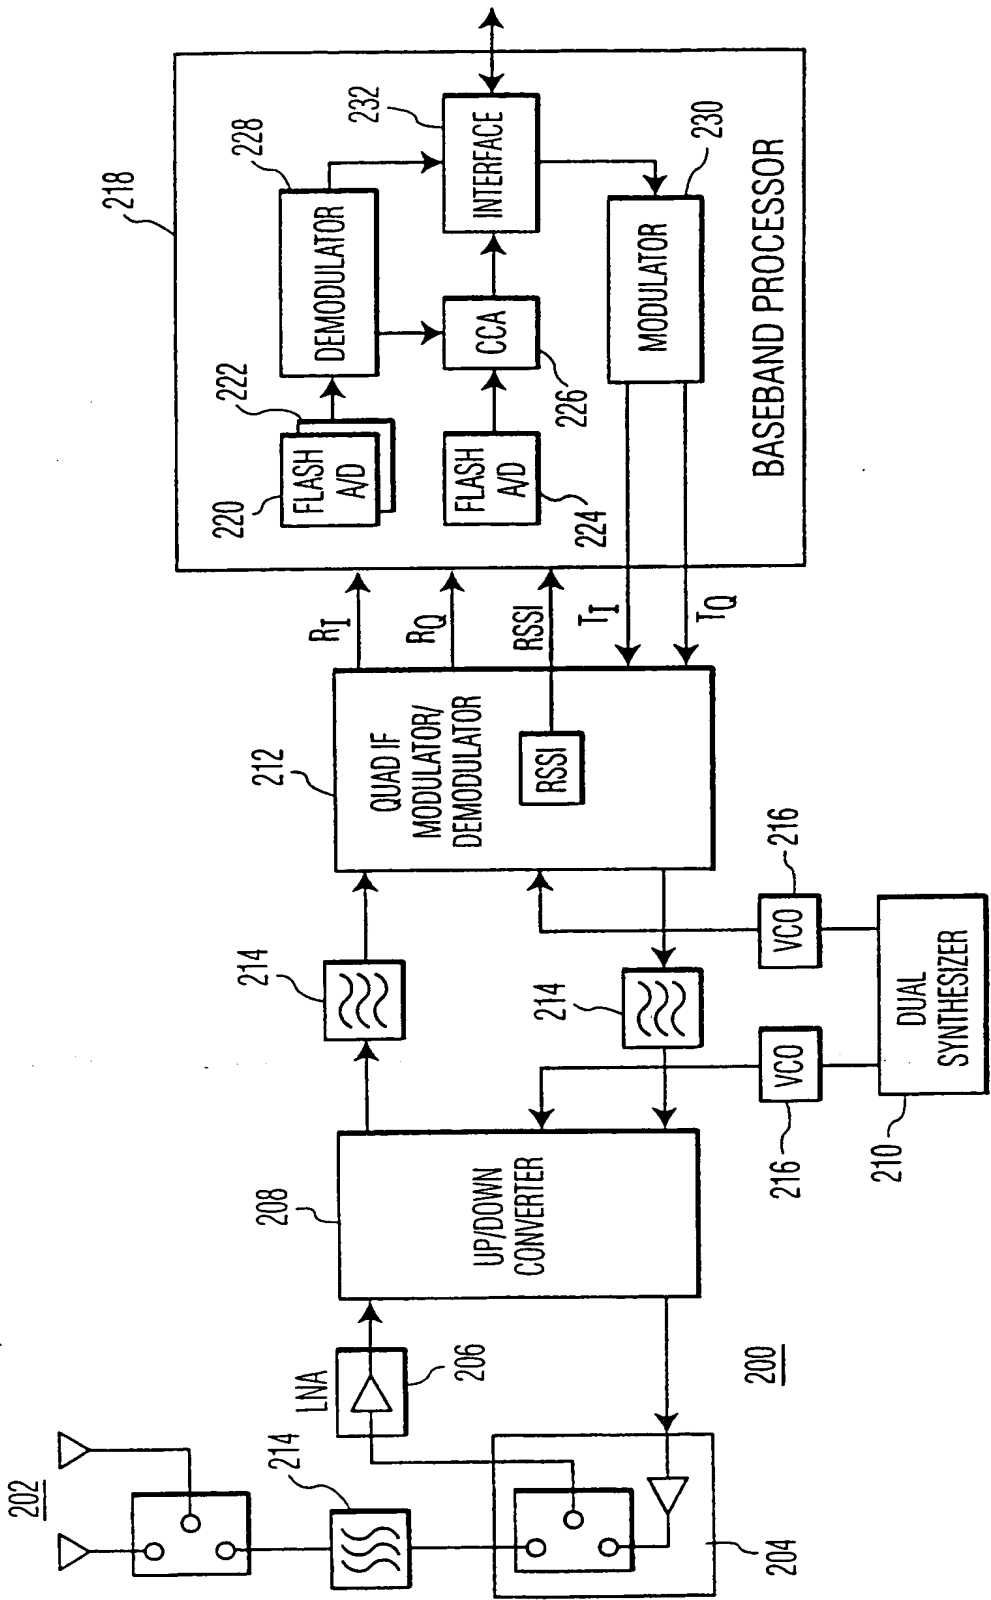


FIG. 2  
PRIOR ART

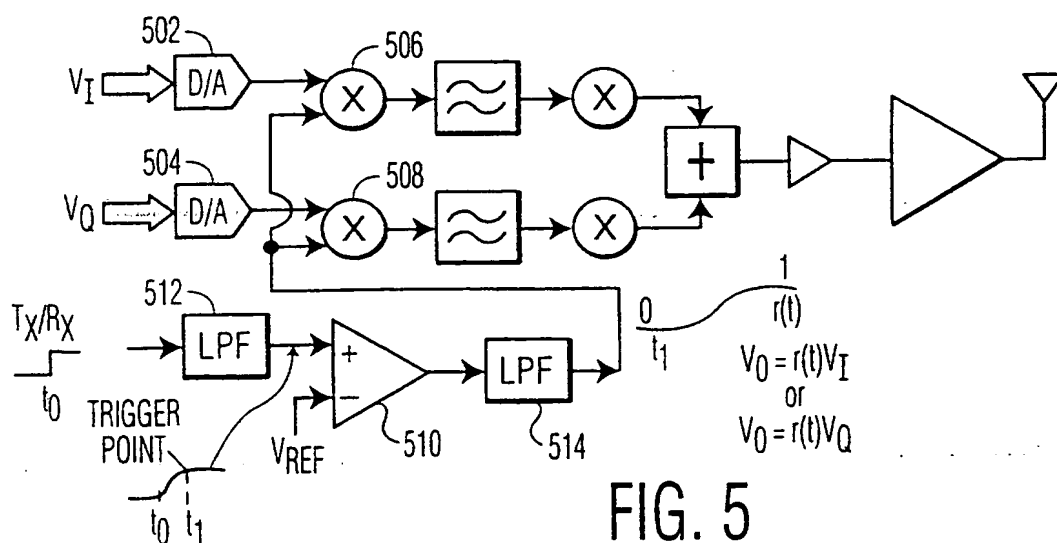

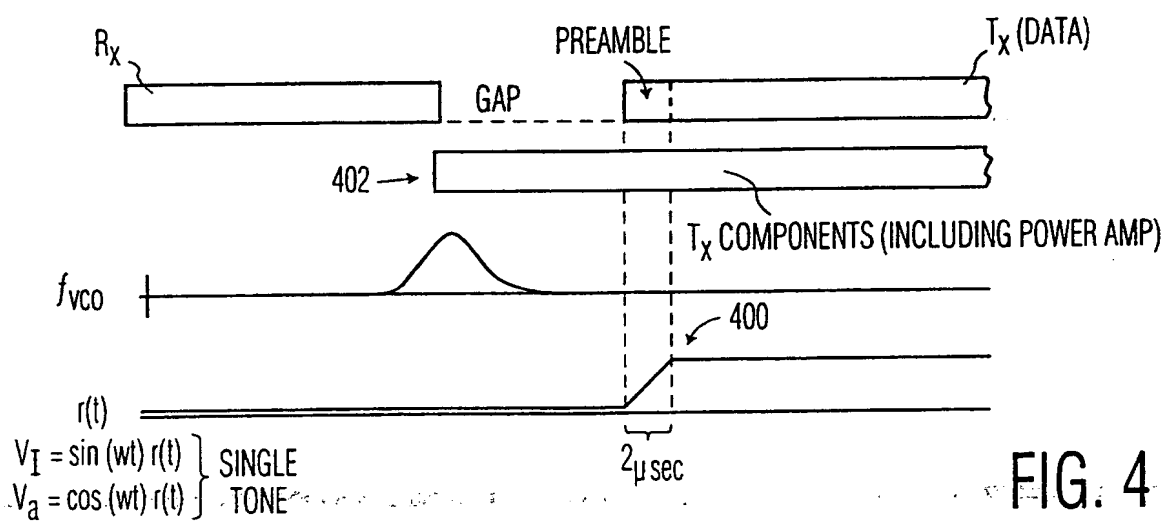

(19) World Intellectual Property Organization  
International Bureau

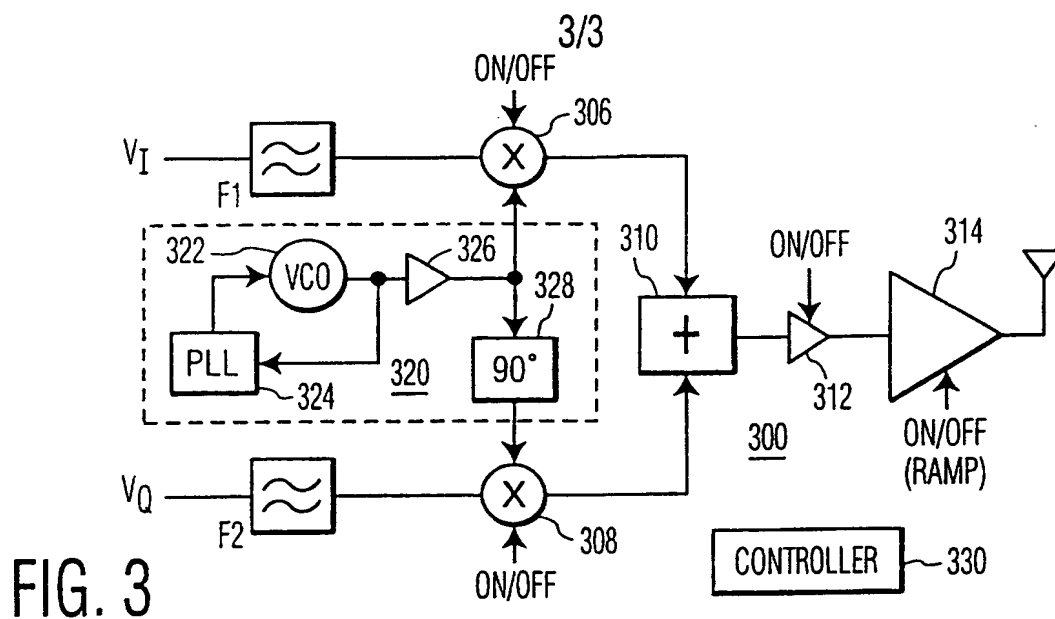

(43) International Publication Date  
28 June 2001 (28.06.2001)

PCT

(10) International Publication Number  
**WO 01/47106 A3**

(51) International Patent Classification<sup>7</sup>: **H03G 3/30**

(74) Agent: CHAFFRAIX, Jean: Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/EP00/12387

(22) International Filing Date: 8 December 2000 (08.12.2000)

(81) Designated States (*national*): CN. JP. KR.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(26) Publication Language: English

(30) Priority Data:  
09/469.887 22 December 1999 (22.12.1999) US

Published:  
— with international search report


(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(88) Date of publication of the international search report:  
2 May 2002

(72) Inventor: MOHINDRA, Rishi: Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRANSMITTER POWER AMPLIFIER RAMPING METHOD

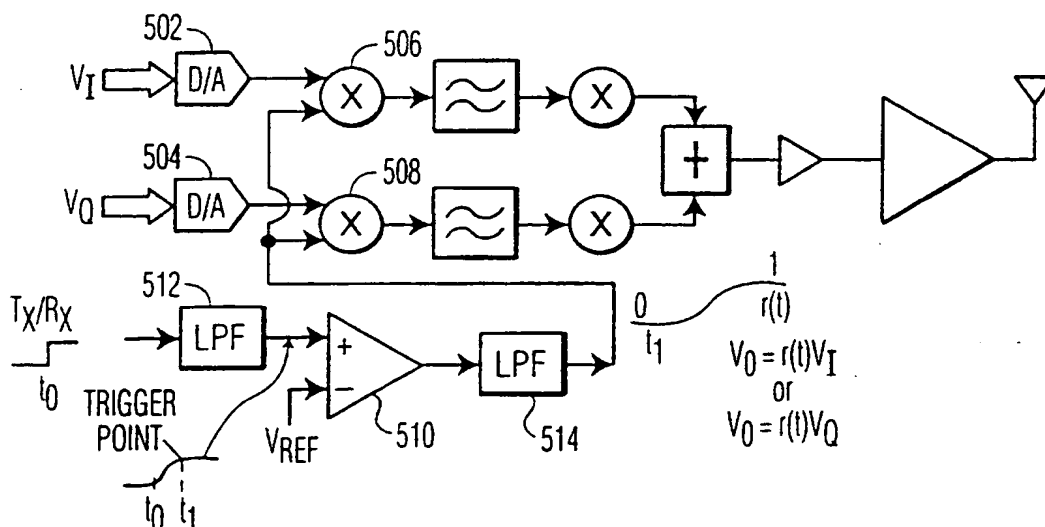

(57) Abstract: A method for reducing frequency glitches in a digital transceiver due to power amplifier input impedance variations. According to the method, the power amplifier is switched on after the end of a prior packet reception period and before a new packet transmission begins. Instead of ramping the power amplifier gain, the method ramps the modulation signals. As a consequence, any VCO frequency transients that may result from turning on the power amplifier have an opportunity to decay before the new packet transmission is initiated. This technique effectively isolates the transmitter power amplifier from the frequency synthesizer VCO to facilitate fast switching transceiver operation.

WO 01/47106 A3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 00/12387

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H03G3/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H03G H03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 697 073 A (DANIEL CHRISTOPHER JOHN ET AL) 9 December 1997 (1997-12-09) the whole document	1,6
X	EP 0 800 267 A (MATSUSHITA ELECTRIC IND CO LTD) 8 October 1997 (1997-10-08) abstract	1,6

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*S\* document member of the same patent family

Date of the actual completion of the international search

11 June 2001

Date of mailing of the international search report

18/06/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Blaas, D-L

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/12387

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5697073 A	09-12-1997	CA 2173608 A	07-03-1996
		EP 0725998 A	14-08-1996
		FI 961753 A	24-04-1996
		IL 114454 A	30-10-1998
		WO 9607241 A	07-03-1996
EP 0800267 A	08-10-1997	JP 9275424 A	21-10-1997
		CA 2201408 A	04-10-1997
		CN 1168588 A	24-12-1997
		KR 226033 B	15-10-1999

DOCKET NO: C&L-I 0259

SERIAL NO: 10/715,070

APPLICANT: Wenzel et al.

LERNER AND GREENBERG P.A.

P.O. BOX 2480

HOLLYWOOD, FLORIDA 33022

TEL. (954) 925-1100